

COOLSHOT 20igm



LOCKED ON QUAKE

Gentle vibration to confirm you are ranging the flag and not something behind it.



RAINPROOF IPX4 rated — allows you

to continue use even in the rain.



LONG EYE RELIEF

Provides 15mm or more of eye relief. Perfect for evealass wearers.



MULTILAYER COATING

Multilayer coating is applied to one or more lens and prism surfaces.



ID TECHNOLOGY

Delivers the one number you need for your best shot to account for incline or decline shooting angles.



LCKED N QUAKE


Locked On Quake Technology

Targeting the pin? LOCKED ON QUAKE confirms you've hit the flag and not something in the background. It provides a gentle vibration as a cue to signify that you're measuring the pin, not a tree or other object behind it.



ID Slope Technology

When ID Slope Technology mode is selected, COOLSHOT 20i GIII displays the slope-adjusted distance (Horizontal distance ± Height,) which becomes your guide for how far you should hit your ball and what club to use.

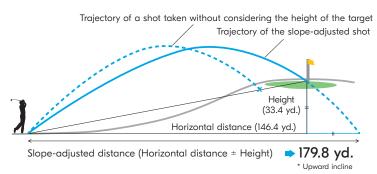

A little rain won't keep you off the course, and it won't stop the COOLSHOT 20i GIII from performing.



Give Your Game An Edge nikonusa.com/golf @ nikongolfusa



All Nikon products include Nikon Inc. limited warranty. Nikon Authorized Dealers and Resellers set their own selling prices, which may vary.

Get accuracy from any angle.

Get accuracy from any angle with the COOLSHOT 20i GIII, the third generation of Nikon's lightweight, rainproof COOLSHOT 20i golf rangefinder. Featuring integrated slope technology and superior Nikon optics with a multilayer coating and 6X magnification, you'll be ready for the most challenging courses. Golf Mode compensates for uphill and downhill shots— essential for deciding what club to use. First Target Priority assures that the measurement shown is for the flagstick and not any objects in the background. Locked-on Quake provides a gentle vibration as an added confirmation that you're on the pin. You can even scan for up to 8 seconds to get real-time measurements for obstacles, doglegs and other hazards.

SPECIFICATIONS	COOLSHOT 20i GIII	
PRODUCT NUMBER	16781	
MAG. X OBJ. DIAMETER	6 x 20	
MEASUREMENT RANGE* (YDS) MAX RANGE (GUIDE FOR MEASUREMENT DISTANCE TO FLAGSTICK)* (YDS)	6-800	
ACCURACY** (ACTUAL DISTANCE IN YDS)	±1 M/YD. (SHORTER THAN 100 M/YD.) ±2 M/YD. (100 M/YD. AND OVER)	
VIEWFINDER DISPLAY	m/YD	
MAGNIFICATION	6х	
ANGULAR FIELD OF VIEW (REAL)	6°	
FOV @ 100 YDS. (FT.)	31.4	
EYE RELIEF (MM)	16.7	
DIOPTER ADJUSTMENT	±4 m-1	
POWER SOURCE	CR2 lithium battery	
SIZE (LXHXW) INCHES	3.6 x 2.9 x 1.5	
WEIGHT (W/O BATTERIES) (OZ.)	4.6	
OBJECTIVE DIAMETER (MM)	20	
EXIT PUPIL (MM)	3.3	
LASER CLASSIFICATION	IEC60825-1: CLASS 1M/LASER PRODUCT FDA/21 CFR PART 1040.10: CLASS I LASER PRODUCT"	
ELECTROMAGNETIC COMPATIBILITY	FCC PART15 SUBPARTB CLASS B, EU:EMC DIRECTIVE, AS/NZS, VCCI CLASSB, CU TR 020, ICES-003, GB:ELECTROMAGNETIC COMPATIBILITY REGULA- TIONS"	
ENVIRONMENT	ROHS, WEEE	

^{*}Under Nikon's measurement conditions and reference values.

The specifications of the product may not be achieved depending on the target object's shape, surface texture and nature, and/or weather conditions.

PRODUCT NUMBER	DESCRIPTION	RETAIL PRICE
16781	COOLSHOT 20i GIII	\$239.95

The technology behind the Laser Rangefinder with inclinometer originated from technology incorporated in Nikon's Total Station DTM-1 surveying instrument.

The Total Station DTM-1, first sold in 1985, was the first highly advanced electronic model of those surveying instruments that incorporated a distance and angle measuring capability developed by Nikon Corporation.

Technical Information: 1-800-NIKON US Service & Repair: www.nikonusa.com/service

^{**}Under Nikon's measurement conditions.