




SHENZHEN YUCHIP LIGHTING CO.,LTD

Email: manager@yuchip.com

Website: www.yuchip-led.com

Transparent LED Display

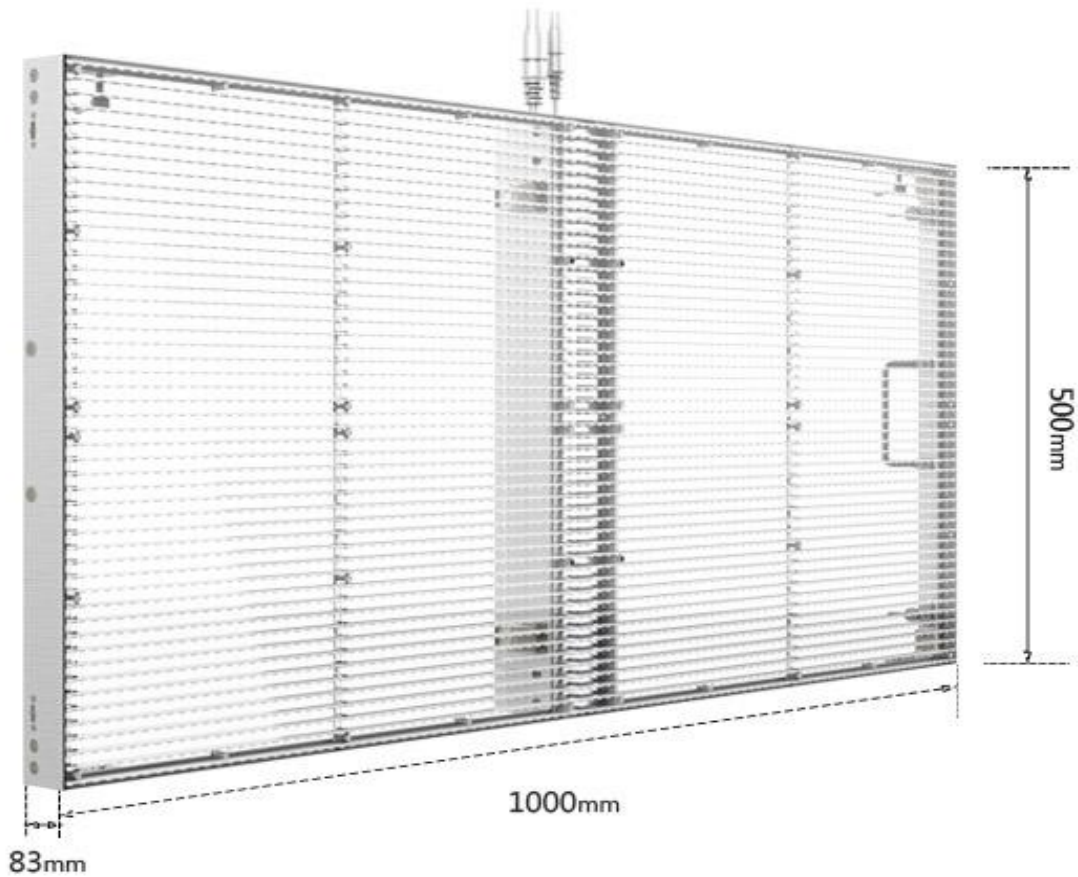



Featrues:

1.Ultra-transparent

Permeability is 60% -90%, translucent, ventilation, does not affect the lighting and line of sight

2.Customized is available

Modern transparent LED display has all kinds of types, the structure is complex, the size isn't the same, the standard cabinet couldn't meet the needs of all projects , CONCRE can be customized the best product solution according to the reality situation, to ensure the permeability of transparent LED display, completeness of display and consistency.

3.Indoor installation for outdoor viewing

Easy to maintenance, safety, less approval processes than outdoor advertising .

4.Energy saving, fast cooling

Edge-lit LED encapsulation technology, small LED size, high brightness, low current, saving 30% energy than general SMD LED display.

Install Mothed:

Stand installation



Hanging installation



SHENZHEN YUCHIP LIGHTING CO.,LTD

Email: manager@yuchip.com

Website: www.yuchip-led.com

Application:





Parameter:

Model	P3. 91	P3. 91	P7. 81	P7. 81	P10. 4
Pixel pitch	3. 91-7. 81	3. 91-7. 82	7. 81	7. 81-15. 625	10. 4
Lamp	Indoor SMD2121	Outdoor SMD1921	Outdoor SMD2525	Outdoor SMD2525	Outdoor SMD2525
Pixel density	32768	32768	16384	8192	9230
Module size	500mm*500 or 500mm*1000mm or 1000mm*1000mm Can be Customized Size available				
Cabinet material	Acrylic Aluminum Steel				
weight	15KG/m ²	15KG/m ²	14KG/m ²	14KG/m ²	14KG/m ²
Transparency	65%	65%	70%	75%	80%
Brightness	≥1000nit	≥4500nit	≥4500nit	≥4500nit	≥4000nit
Refresh rate	≥1920HZ				
Scan mode	1/16	1/8	1/2	1/2	1/3
Max power consumption	400W/m ²	600W/m ²	600W/m ²	550W/m ²	550W/m ²
Average power	120W/m ²	180W/m ²	180W/m ²	180W/m ²	180W/m ²
PCB	FR-4 four layers board, 2.0mm thickness				
Driver IC	MBI5124, Hight Refresh Rate				
Installation	Hanging or Stacking				
Brightness level	256 Level				
Installation	Indoor IP30				